



DATA

Voltage	2.00 V
Performance	1440Ah C120 to 1.85V/cell at 2
Float Voltage	2.25V/cell at 20°C
Connection torque	20 - 25 Nm
Max Charge Current	240.00 A
Weight (Typical)	84.0 KG

LAYOUT

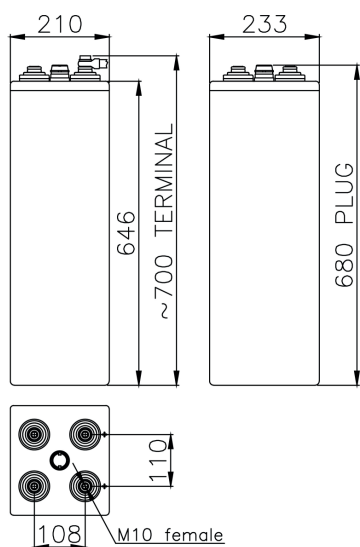

CONNECTION SET

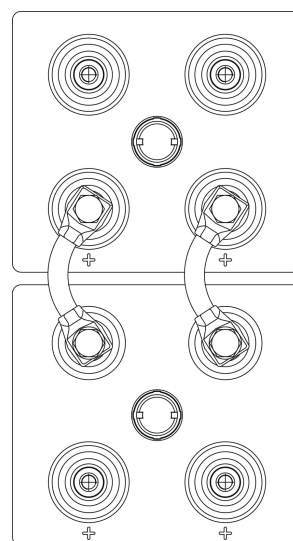

PERFORMANCES

[A] at 25°C

V / cell	h.	1	3	5	8	10	12	20	24	48	72	100	120
1.85		395	248	176	131	115	98.5	62.5	52.9	27.8	21.0	14.3	12.2
1.88		367	233	168	126	109	93.2	59.1	50.1	26.3	19.9	13.4	11.4
1.90		348	223	162	122	105	89.6	56.9	48.3	25.4	19.1	12.9	10.9
1.95		247	172	132	100	86.9	75.1	48.8	41.5	22.1	15.6	9.13	4.60