



### DATA

Voltage	<b>2.00 V</b>
Performance	<b>660Ah C120 1.85V/cell 25°C</b>
Float Voltage	<b>2.25V/cell at 20°C</b>
Connection torque	<b>20 - 25 Nm</b>
Max Charge Current	<b>106.00 A</b>
Weight (Typical)	<b>40.0 KG</b>

### LAYOUT

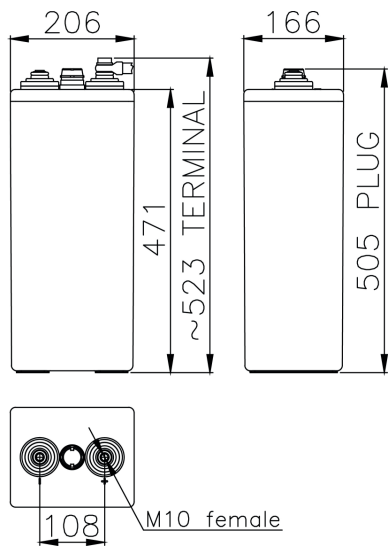

### CONNECTION SET

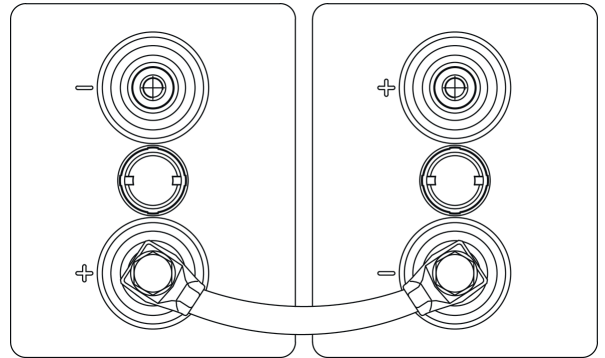

### PERFORMANCES

[A] at 25°C

V / cell	h.	1	3	5	8	10	12	20	24	48	72	100	120
1.85		227	122	83.6	59.8	51.1	43.1	26.7	22.4	11.9	9.20	6.45	5.61
1.88		202	111	78.0	56.3	47.9	40.6	25.1	21.1	11.2	8.62	6.02	5.21
1.90		186	104	74.3	53.9	45.8	38.9	24.0	20.2	10.7	8.23	5.74	4.95
1.95		153	90.6	62.6	44.8	38.4	32.7	20.3	17.1	9.13	6.58	4.04	2.03