

LION PART NUMBER	BATTERY TYPE	V	CCA -18°C	AH 5HR	RC MINS	DIMENSION (MM)				WEIGHT (KG)
						L	W	H	TH	
LION - BRITISH STANDARD BATTERIES										
MPC 07	VCD 170	-	-	162	-	61	158	400	431	10
MPC 13	MPC 13	-	-	324	-	109	158	400	431	19.0
MPC 15	VCDH 400	-	-	400	-	128	158	409	441	23.1
MPC 17	VCDH 460	-	-	460	-	143	158	409	441	25.8
MPC 19	VCDH 520	-	-	520	-	159	158	409	441	28.8
MPC 21	VCDH 580	-	-	580	-	175	158	409	441	32.0
MPC 23	VCDH 630	-	-	630	-	191	158	409	441	34.8
MPE 07	VCI 225	-	-	225	-	61	158	519	551	13.7
MPX 09	VCI 285	-	-	285	-	70	158	519	551	16.8
MPX 11	VCI 365	-	-	365	-	90	158	519	551	21.0
MPE 13	VCI 440	-	-	440	-	109	158	519	551	25.2
MPE 15	VCI 525	-	-	525	-	126	158	519	551	29.8
MPE 17	VCI 536	-	-	536	-	143	158	519	551	31.0
MPE 17H	VCI 585	-	-	585	-	148	158	519	551	33.6
MPE 19	VCI 660	-	-	660	-	165	158	519	551	37.7
MPE 23	VCI 740	-	-	740	-	185	158	519	551	42.6
MPE 25	VCI 845	-	-	845	-	203	158	519	551	48.7
MPE27	VCI900	-	-	900	-	222	158	519	551	51.0
MPE31	VCI1080	-	-	1080	-	241	158	519	551	58.8
MPJ07	VCJ3	-	-	300	-	61	158	691	723	19.1
MPJ09	VCJ4	-	-	400	-	76	158	691	723	24.3
MPJ11	VCJ5	-	-	500	-	90	158	691	723	28.5
MPJ13	VCJ6	-	-	600	-	109	158	691	723	34.6
MPJ15	VCJ7	-	-	700	-	128	158	691	723	39.7
MPJ17	VCJ8	-	-	800	-	143	158	691	723	46.0
MPJ19	VCJ9	-	-	891	-	157	158	691	723	51.3
MPJ21	MPJ21	-	-	990	-	173	158	691	723	56.7
LION - DIN BATTERIES										
WAF09	4PZS240	-	-	240	-	83	198	340	370	15.5
WAF11	5PZS300	-	-	300	-	101	198	340	370	19.7
WBF07	3PZS240	-	-	240	-	65	198	405	435	14.0
WBF11	5PZS400	-	-	400	-	101	198	405	435	24.7
WBF13	6PZS240	-	-	480	-	119	198	405	435	29.3
WCF09	4PZS360	-	-	360	-	83	198	473	503	22.8
WEF05	2PZS250	-	-	250	-	47	198	573	604	14.3
WEF07	3PZS375	-	-	375	-	65	198	573	604	22.3
WEF09	4PZS500	-	-	500	-	83	198	573	604	29.0
WEF11	5PZS625	-	-	625	-	101	198	573	604	35.6
WEF13	6PZS750	-	-	750	-	119	198	577	604	41.7
WFF05	2PZS310	-	-	310	-	47	198	719	750	19.1
WFF07	3PZS465	-	-	465	-	65	198	719	750	27.8
WFF09	4PZS620	-	-	620	-	83	198	719	750	36.1
WFF11	5PZS775	-	-	775	-	101	198	719	750	44.4
WFF13	6PZS930	-	-	930	-	119	198	713	750	51.9



1300 START ME | 1300 782 786
info@lionbatteries.com.au
www.lionbatteries.com.au

NSW - Head Office 20 Rowood Road Prospect NSW 2148 QLD 316 Evans Road Salisbury QLD 4107
VIC Unit 1/16 Childs Road Epping VIC 3076 WA 4/2 Sphinx Way, Bibra Lake WA 6163
SA 30 Donegal Road, Lonsdale SA 5160 ACT Unit 19 Paterson Pde, Queanbeyan West NSW 2620



LION BATTERIES



INDUSTRIAL BATTERIES



LION INDUSTRIAL BATTERIES - MOTIVE POWER

Lion Motive Power stands ready to meet the demands of the growing Australian traction battery market, incorporating commercial business such as electric forklifts, material handling equipment and associated applications. Selling products under the iconic Lion brand, Lion Motive Power is fully equipped to meet both the on and off site demands of busy customers requiring quality traction batteries for commercial applications.

A prompt on site traction battery replacement and repair service is available, designed to minimise equipment downtime and improve operational efficiencies.

Lion Motive Power is part of the Lion Batteries group of companies servicing the Australian battery market for over 60 years.

OUR PROMISE TO YOU

- Technically competent, professional staff
- Prompt response times for all battery service enquiries, quotations and orders
- Industry leading product quality backed by the world's premium manufacturers
- Flexibility to meet your individual battery and service requirements
- The confidence of dealing with a solid and experienced Australian company

Field Service


Lion Motive Power offers a prompt on site battery replacement and repair service, designed to minimise equipment downtime and improve operational efficiencies. Lion Motive Power can provide:

- Battery Replacement
- Cell replacement
- Battery system diagnosis
- Battery repairs
- Discharge testing
- Battery monitoring

Warranty

Lion Motive Power warrants the original user that lion Motive cells will be free from defects in materials and workmanship for a period of two years from the date of purchase. Should Lion motive Power find any cell or battery to be defective in material or workmanship as above, it will be repaired or replaced free of charge.

In addition to this guarantee, Lion Motive Power further warrants the original user that Lion Motive Power batteries carry a three year pro rata warranty at the completion of the two year guarantee period. This amounts to a service life warranty of five years or 1500 cycles based on one full charge and discharge to a depth of 80% in any 24 hour period. This warranty is in addition to any conditions or warranties imposed or implied by any laws in force in Australia.

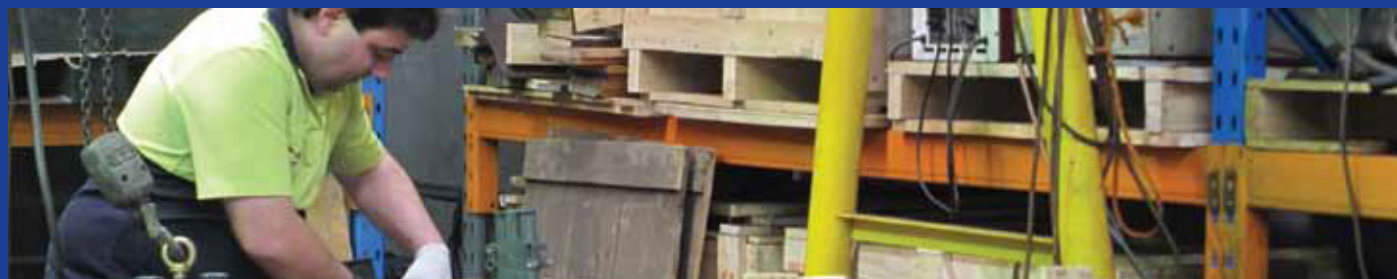

ACCESSORY PRODUCTS

Lion Motive Power's range of accessory products include the following:

Single Point Automatic Battery Watering System

Increase service efficiency and safety by:

- Rapid one step battery filling with overflow protection.
- Double chamber "Hydrogen Block" safety feature to isolate water and gas movement.
- Visual access to all plugs.

Pressure Regulated Water Filling Gun

Compliment and enhance your watering system with:

- Pressure regulated manual delivery gun
- Flexible componentry including pressure regulators, filling tips, flow indicator, gun handle and connectors.



SEMI-TRACTION CYCLING BATTERIES

Lion brand semi-traction cycling batteries will power your material handling needs across all smaller electric applications.

- Extended cycle life capabilities against normal calcium sealed batteries gives maximum performance and lower maintenance costs.
- Advanced manufacturing design technologies provide improved deep cycle performance characteristics.
- Rapid recharge acceptance and improved vibration add to the extended life of the batteries.



THE TECHNICAL STORY

Lion Motive Power's tubular cell technology offers longer service life in your electric forklift.

Tubular Positive Plate Cells

Designed to hold active materials in place to reduce shredding and provide maximum capacity and power.

Die-casting Grid

Constructed to extend traction cell service life due to anti-corrosion characteristics.

Rubber Bushing

Excellent protection from external shocks and vibration.

One Touch Vent Plug

Convenient and simple refilling and maintenance.

Heat Sealed Case and Cover

Polypropylene construction offering high impact resistance and heat sealed for leak proof protection.